


AIRFLOW™ 1 VBA 400A MR

400 ML CARTRIDGE DISPENSER

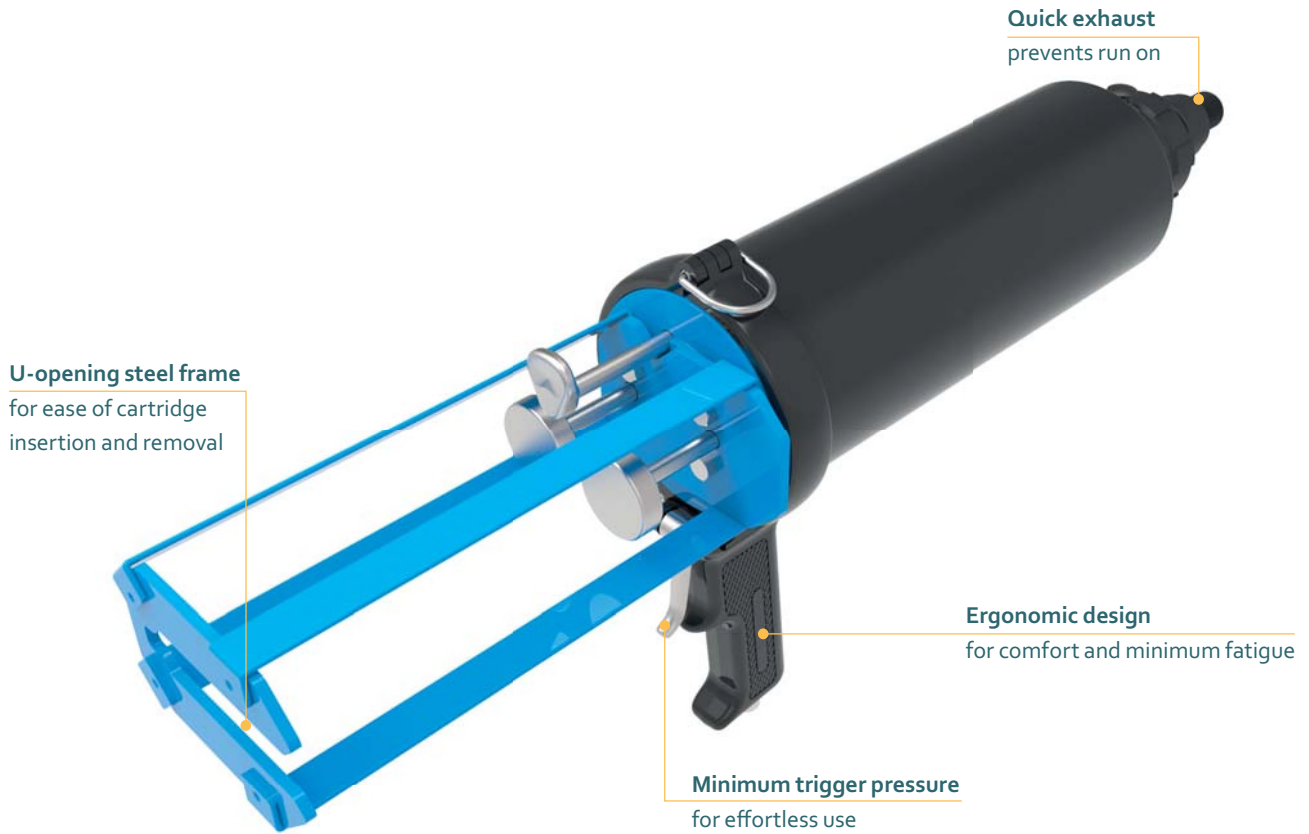

Model shown: AirFlow 1 VBA 400B MR 400 mL

FEATURES

- Air return as standard
- Adjustable air regulator
- Minimum trigger pressure
- U-opening steel frame
- Quick exhaust valve
- Customization possible


BENEFITS

- Fast, accurate and effortless application
- Ensures precise controlled pressure
- For effortless use and minimum fatigue
- Ease of cartridge insertion and removal
- Prevents run-on
- Customer labelling

APPLICATIONS



PRODUCT BY RANGE

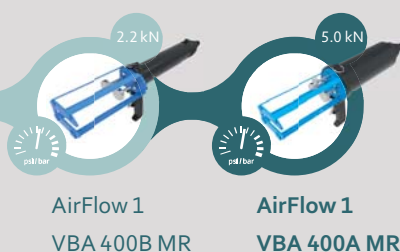

AirFlow 1
VBA 400B MR


AirFlow 1
VBA 400A MR

THE AIRFLOW 1 VBA 400A MR 2-COMPONENT MULTI-RATIO PNEUMATIC DISPENSER WITH ADJUSTABLE AIR REGULATOR ENSURES PRECISE AND CONTROLLED PRESSURE FOR EFFORTLESS APPLICATION.

SPECIFICATIONS

- Weight: 3.3 kg / 7.3 lbs
- Frame Length: 203 mm / 8.0 in
- Maximum Thrust: 5.0 kN
- Maximum Pneumatic Pressure: 6.8 bar / 100 psi
- Air Consumption: 40 litres/min
- Handle Material: Epoxy Coated Aluminum
- Frame Material: Epoxy Coated Steel
- Tool Component Approvals: CE, REACH
- Cartridge Capacity: 400 mL (14 oz)
- Cartridge Ratio: 1:1, 2:1, 4:1, 10:1
- Viscosity: Medium/High
- Standard Color: Black/Blue
- Customized versions on demand

DIMENSIONS

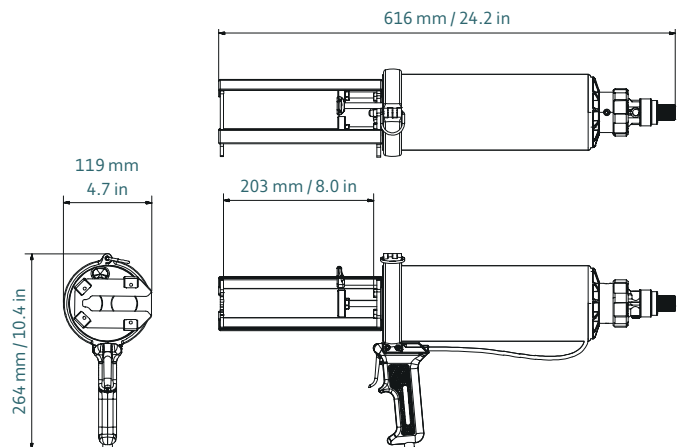

| Part number | Article number | Packaging |
|---------------------|----------------|-----------|
| DP2C 400-MR-525-101 | 177688 | 1 per Box |

MATCHING MIXPAC™ SIDE-BY-SIDE CARTRIDGES



C-System/F-System
400 mL / 1:1 PP/PA



C-System/F-System
400 mL / 2:1 PP/PA



C-System/F-System
400 mL / 4:1 PP/BPT



C-System/F-System
400 mL / 10:1 PP/BPT




BlueLine
400 mL / 2:1 PP/BPT




BlueLine
400 mL / 10:1 PP/BPT


COMPATIBLE SIDE-BY-SIDE CARTRIDGES



Plastic Cartridge
400 mL / 1:1 PP/PBT



Plastic Cartridge
400 mL / 2:1 PP



Plastic Cartridge
400 mL / 10:1 PP/PBT

| | 1:1 | mm | inch | 2:1 | mm | inch | 10:1 | mm | inch |
|---|-----|--------|--------|-----|--------|--------|------|--------|--------|
| l | | 185.0 | 7.28 | l | 185.0 | 7.28 | l | 185.0 | 7.28 |
| a | | Ø 45.0 | Ø 1.77 | a | Ø 47.0 | Ø 1.85 | a | Ø 65.0 | Ø 2.56 |
| c | | 93.0 | 3.66 | b | Ø 33.0 | Ø 1.3 | b | Ø 19.5 | Ø 0.77 |
| | | | | c | 96.0 | 3.78 | c | 94.0 | 3.7 |

CONVERSION KITS

MATCHING ACCESSORIES